(19) World Intellectual Property Organization International Bureau

16 December 2004 (16.12.2004)

(43) International Publication Date



(10) International Publication Number WO 2004/108474 A2

(51) International Patent Classification7:

B60P 1/28

(21) International Application Number:

PCT/GB2004/002402

(22) International Filing Date:

4 June 2004 (04.06.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 0313118.2

6 June 2003 (06.06.2003)

(71) Applicant and

(72) Inventor: HESKIN, Keith, Clifford [GB/GB]; Andover House, Fairmile, Henley-on-Thames Oxforshire RG9 2LA

(74) Agents: MCLEISH, Nicholas, Alistair, Maxwell et al.; Boult Wade Tennant, Verulam Gardens, 70 Gray's Inn Road, LONDON WC1X 8BT (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Declaration under Rule 4.17:

of inventorship (Rule 4.17(iv)) for US only

Published:

without international search report and to be republished upon receipt of that report

[Continued on next page]

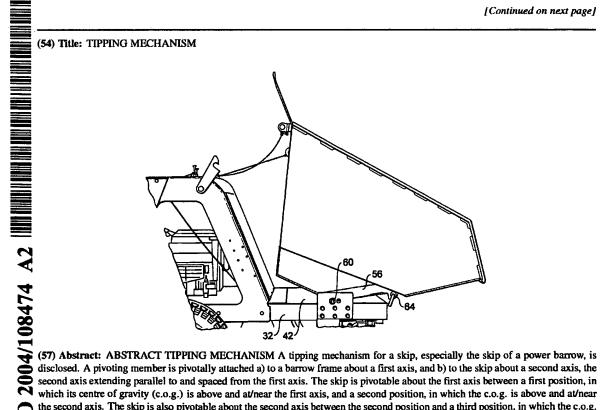

which its centre of gravity (c.o.g.) is above and at/near the first axis, and a second position, in which the c.o.g. is above and at/near the second axis. The skip is also pivotable about the second axis between the second position and a third position, in which the c.o.g. is forward of the second axis. The skip may pivot from the first to third positions automatically, or by manual initiation, for some or all of the positions, to discharge the skip contents.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.